



## Features

- Class: Expert, power density up to **2335 W/dm<sup>3</sup>**
- Without Fan
- Low profile: 39,1 mm design with terminal blocks
- Case operating temperature ranges: -40°C...+85°C, -50°C...+85°C, for request -60°C
- Output current up to 200 A, output power 5000 W
- Three phase input voltage range 304...456 VAC
- Passive Power Factor Corrector (PFC)
- Parallel operation
- Additional output for fan
- Over current, short circuit, overvoltage and thermal protection, remote on/off by applying voltage or with breaker
- Output voltage adjustment
- Remote feedback
- Output diagnostics («Output good»)
- Max capacitance – not limited
- Metal case

## Description

**AC/DC power supplies (modules) JETA5000-380** with three phase input voltage are especially designed for industrial applications and harsh environment operation. This compact unit (300 x 170 x 39,1 mm) proven maximum output power of up to 5000 W. The units can be switched on/off by a signal, have a full protection complex against over current, short circuit and overheating; they also can be connected in parallel or in series and provide compliance to EMC standard EN55022, class A (class B with external filter).

Modules are made of customized element base. They are sealed with heat-conducting potting material and could have wide operating temperature range up to -60°C...+85°C, featuring a thermal protection chip. These power supplies undergo special temperature and burn-in tests with extreme on/off modes.

## Ordering information

**JETA 5000 - 380 S 27 - S C N**

**1 2 3 4 5 6 7 8**

- 1 - «JETA» Series
- 2 - Max output power, W
- 3 - Input voltages  
**380** – 3 ph. 380 VAC (304...456 VAC)
- 4 - Index of output channels quantity  
**S** – one
- 5 - Nominal output voltage, VDC (two signs for a channel)
- 6 - Index of design option  
**S** - modification with polymer potting protection
- 7 - Index of case design and outputs  
**C** - case with a cover and terminal blocks
- 8 - Index of operating temperature range of the case  
**N** -40°C...+85°C (basic version), for request -60°C...+85°C

## Technical information

### Standard models with one output

| Module                     | Input voltage range | Output power | Output voltage / nominal output current | Typical efficiency |
|----------------------------|---------------------|--------------|---|--------------------|
| <b>JETA5000-380S24-XXX</b> | ~304...456 VAC      | 4800 W       | 24 B / 125 A                            | 92%                |
| <b>JETA5000-380S27-XXX</b> |                     | 5000 W       | 27 B / 185 A                            | 92%                |
| <b>JETA5000-380S48-XXX</b> |                     |              | 48 B / 104 A                            | 93%                |

Modules with non-standard output voltage from 24 to 60 VDC with maximal output current up to 200 A, could be delivered by request.


## Specifications for AC/DC power supplies JETA5000-380\*

| <b>Input specifications</b>   |  |
|---|--|
| Linear input voltage range, the connection to the "triangle"  | ~ 304...456 VAC (accepted=428...643V)  |
| Input frequency   | 47...65 Hz   |
| Power factor  | >0,9   |
| <b>Output specifications</b>  |  |
| Output voltage adjustment using trimmer resistor ADJ  | ±5%  |
| Output voltage adjustment using pin ADJ   | -30%...+10%  |
| Instability of output voltage in accordance to changing of output current from 10 to 100%   | ±2%  |
| Instability of output voltage in accordance to instability of input voltage   | ±0,5%  |
| Ripple and noise (peak-to-peak) (20 MHz)  | <2% Uout   |
| Overvoltage protection**  | >125% Uout   |
| Over current protection level & short circuit protection**  | Iout limiting at 110-120% of Iout nom  |
| Remote On/Off   | Shuts down by applying 3...5VDC (≤5 mA) on REM outputs or connecting «ADJ» & «+REM»  |
| Max capacitance   | not limited  |
| Output for fan  | 9.5...13 VDC, I <sub>max</sub> =200 mA   |
| Service functions OGOOD   | Controlling "opened-collector transistor": on if output voltage U <sub>out</sub> > 0,7*U <sub>out.nom</sub> ; off if output voltage U <sub>out</sub> < 0,7*U <sub>out.nom</sub> or module is turned off. U <sub>max</sub> = 20 V, I <sub>max</sub> = 15 mA |
| <b>General specifications</b>   |  |
| Case temperature (operating N)  | -40°C ...+85°C, for request -60°C ...+85°C   |
| Case temperature (operating P)  | -60°C ...+85°C   |
| Level of operation of thermal protection (temperature of case)  | 82°C ...+95°C, auto restore  |
| Output power derating (natural convection)  | See diagram (dashed, dash-dotted curves)   |
| Output power with heatsink with thermal resistnace R <sub>ha</sub> =0,035°C/W, difference between ambient and module case temperature would be 15°C | See diagram (solid curve)  |
| High humidity   | 95% @ 35 °C  |
| Conversion frequency, fixed   | 100-120 kHz  |
| Insulation voltage input/case   | ~1500 VAC  |
| Insulation voltage input/output; input/REM, AUX, OGOOD  | ~3000 VAC  |
| Insulation voltage output, REM, AUX, OGOOD/case; output/REM, AUX, OGOOD; REM, AUX/OGOOD   | ~500 VAC   |
| Isolation resistance @ 500 VDC  | 20 MOhm  |
| EMC standards   | EN55022, class A (class B with filter)   |
| Safety standard   | IEC/EN60950  |
| Thermal resistance case — environment without heat sink   | 0,6 °C/W   |
| Typical MTBF (T <sub>case</sub> = 50°C; P <sub>out</sub> = 0,7 P <sub>out max</sub> )   | 30 000 hrs   |
| Cooling method  | Free air convection with heat sink or forced air cooling   |
| Weight (max)  | 3500 g   |

\* All specifications are valid for normal climatic conditions, U<sub>in.nom.</sub>, I<sub>out.nom.</sub>, unless otherwise stated.

\*\* Parameters are stated for the information purposes and could not be used at long term work, exciding maximum output current, at work outside of a range of working temperatures, at module's work with the output voltage over a range of adjustment.

## Output power vs ambient temperature

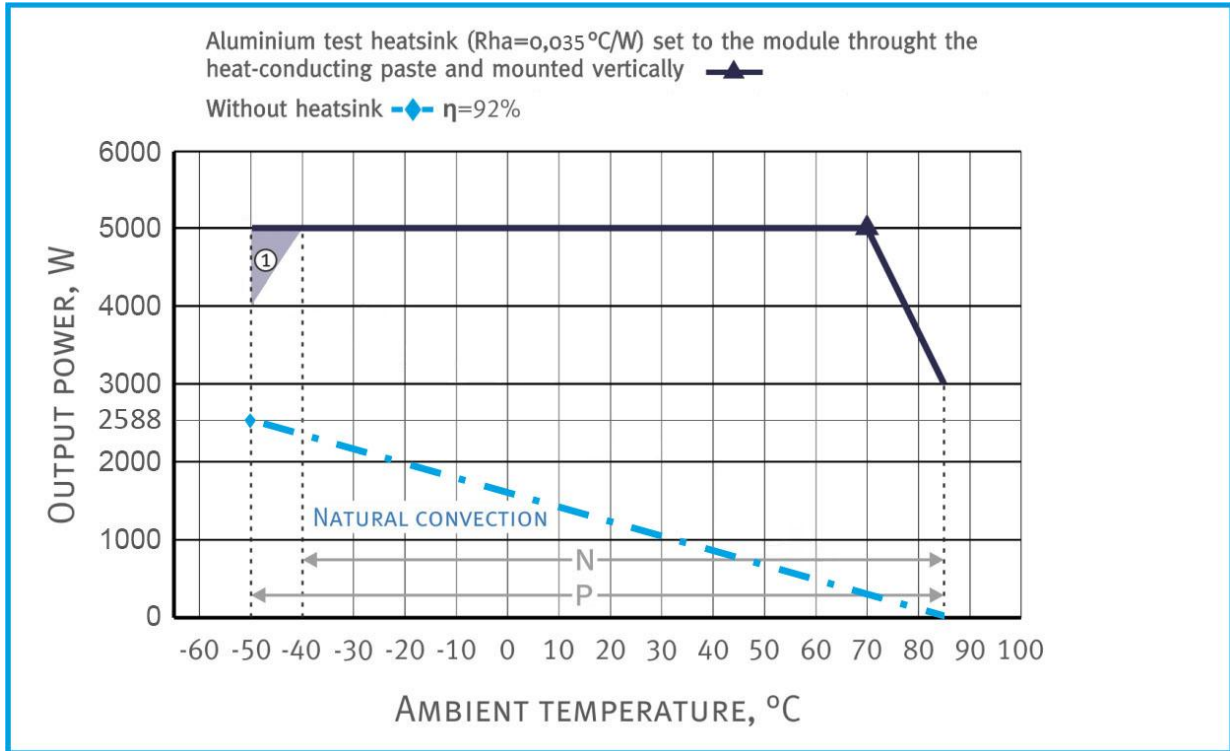


Dropping parts of the dashed and dash-dotted curves are in accordance with the **maximum temperature of the case** (for modules with index «N», «P» equal to +85 °C). Output power must not exceed the values which are limited by corresponding curve for a given ambient temperature.

Modules can be used without a heat sink only when attached to a heat conductive plate with thermal paste. The length and width of the plate should not be less than those of the case, and its thickness must not be less than 6 mm.

Points ▲ and ■ represent simultaneously several extreme worst-case conditions, such as the combination of maximum case temperature and maximum output power. Continuous module operation at these points should be avoided.

## Output power vs input voltages

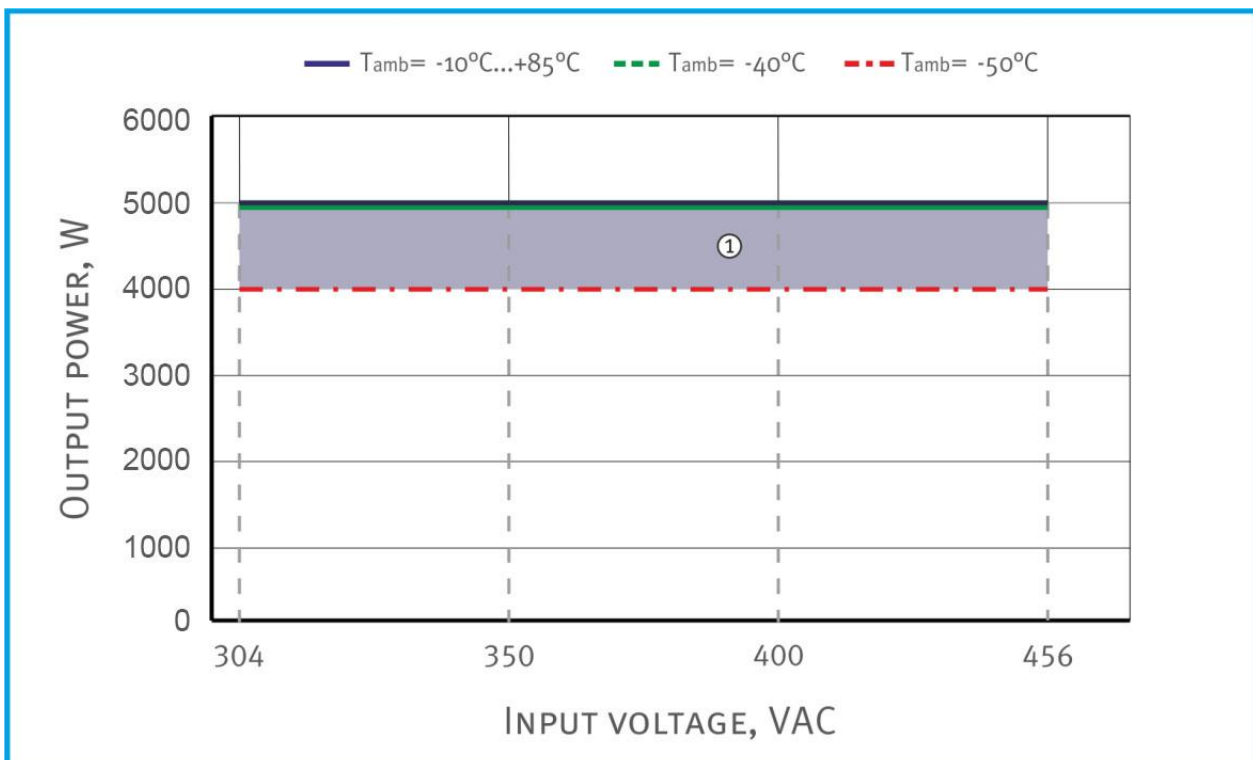

① - For ambient temperature -50°C...-40°C in gray areas of diagrams some specification parameters may not be met.

## Pin out (models with the terminal blocks)


|             |             |              |              |              |              |              |              |              |              |              |             |             |             |             |
|-------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------------|-------------|-------------|-------------|
| <b>X1.1</b> | <b>X1.2</b> | <b>X1.3</b>  | <b>X1.4</b>  | <b>X2.1</b>  | <b>X2.2</b>  | <b>X2.3</b>  | <b>X2.4</b>  | <b>X3.1</b>  | <b>X3.2</b>  | <b>X3.3</b>  | <b>X3.4</b> | <b>X3.5</b> | <b>X3.6</b> | <b>X3.7</b> |
| C           | B           | A            | GND          | -OUT         | -OUT         | +OUT         | +OUT         | +OGOOD       | -OGOOD       | not use      | not use     | ADJ         | PARAL       | +FAN        |
| <b>X3.8</b> | <b>X3.9</b> | <b>X3.10</b> | <b>X3.11</b> | <b>X3.12</b> | <b>X3.13</b> | <b>X3.14</b> | <b>X3.15</b> | <b>X3.16</b> | <b>X3.17</b> | <b>X3.18</b> |             |             |             |             |
| -FAN        | -RS         | -OUT         | +RS          | +OUT         | not use      | not use      | not use      | AUX          | -REM         | +REM         |             |             |             |             |

|                        |   |
|------------------------|---|
| X1.1, X1.2, X1.3, X1.4 | Screw size: <b>6-32x1/4 L</b><br>Recommended Torque: <b>0,5 Nm</b><br>Recommended: Use ring terminal, for example MOLEX 19323-0007, MOLEX 19324-0007.   |
| X2.1, X2.2, X2.3, X2.4 | Screw size: <b>M5</b><br>Recommended torque: <b>2Nm</b><br>Recommended: Use ring terminal, for example Würth Electronics Inc. 5580510 or 5580516.   |
| X3                     | MOLEX, C-GRID III<br>MALE – SDA-90130-1118.<br>FEMALE – SD-90142-0018 (18 pin) USE WITH "GRIMP TERMINAL" SD – 90119-0109 or other.<br>USE "HAND CRIMP TOOL" for C-GRID III female Crimp Terminals for example 63825-8100 or other depending on the CRIMP TERMINALS. |

The use of a central socket for attaching the module to the heatsink is required, whereas the fastening screw must enter the module body to a depth of no more than 7 mm.

Violation of these requirements may result in damage to the module, its failure and entails waivering of the warranty.

### Single output model with terminal blocks (VI A case size)

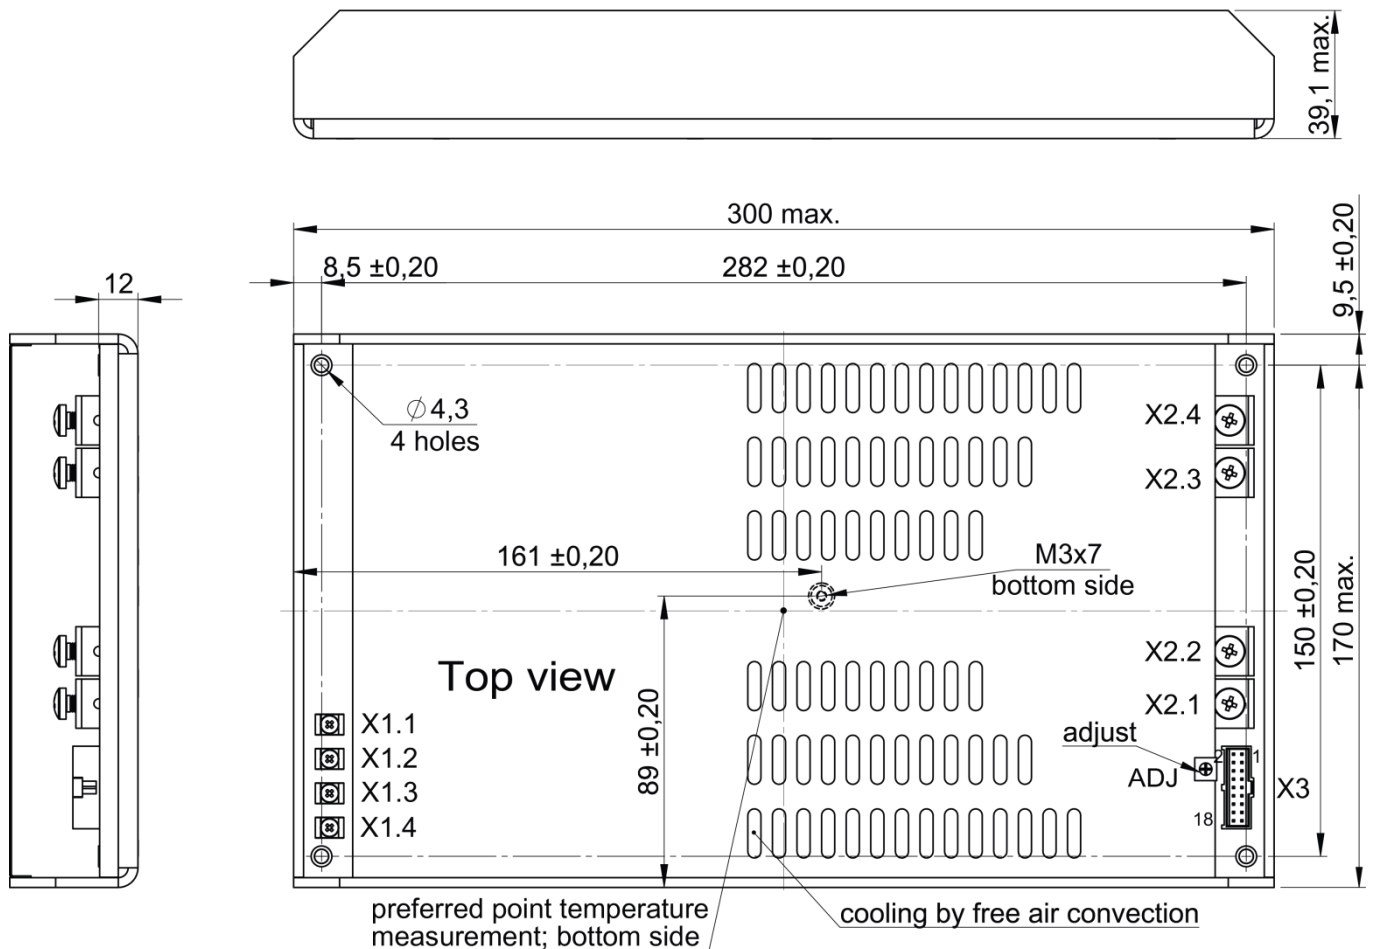

## Certificates

Certificate ISO 9001\*  
CE conformity declaration

\* Management system and R&D of Alexander Electric is ISO certified

## Note

Please note that information given in this document is not complete. More detailed information (additional requirements, typical connection schemes, operation manuals, etc.) may be provided to you upon request.

## Contact information

<http://www.goncharov-jet.com>, e-mail: [aeps@aeps-group.cz](mailto:aeps@aeps-group.cz), phone/fax: +420 281 001 341

According to company's policy in view of constant improvements of the production design the manufacturer reserves the right to itself change the contents of promotional materials without prior notification.